


Model: JY92-IIDN Ultrasonic homogenizer details

Features:

1. LCD big display new type
2. Centralized controlled by microprocessor
3. Step less regulation of the ultrasonic power
4. Set the ultrasonic time and pause time, temperature accord to requirement
5. Real-time temperature, frequency monitoring
6. 10 programmer can be saved
7. Noise reduction 35db
8. Have Sound chamber
9. Have temperature sensor
10. Power 220-240V 50 or 60Hz
11. Programmable timer 999 minutes and adjustable pulse on/off 1 second to 10 seconds



Model	JY92-IIN	JY92-IIDN
Frequency	20-25Khz	20-25Khz
Display	7 inch TFT touch screen	7 inch TFT touch screen
Power range	650W(1%-99%)	900W(1%-99%)
Accompany Tip	6mm	6mm
Optional Tip	2.3.10.12.15mm	2.3.10.12.15mm
Processing volume	0.5-500ml	0.5-600ml
Duty Ratio	1-99%	0.1-99.9%
Temperature Probe	no	YES
Alarm	Overtime overload	Overtime Temperature overload
Ultrasonic host size	430*255*300mm	430*255*300mm
Soundproof box size	345*340*570mm	430*255*300mm
Weight	14kg	14kg
Power supply	220/110v 50hz/60hz	220/110v 50hz/60hz

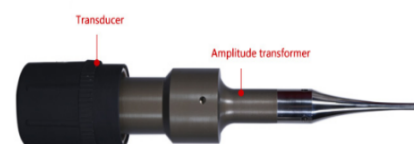

Tip Model		Frequency(KHZ)	Power Range	Crushing Capacity
Φ2	1/12"	20-25KHz	20-250W	0.5-5ml
Φ3	1/8"	20-25KHz	30-400W	3-10ml
Φ6	1/4"	20-25KHz	60-650W	10-100ml
Φ10	5/12"	20-25KHz/19.5-20.5KHz	100-950W	100-200ml
Φ12	1/2"	20-25KHz	100-950W	100-200ml
Φ15	5/8"	20-25KHz/19.5-20.5KHz	200-950W	200-500ml
Φ18	3/4"	20-25KHz	200-950W	200-500ml
Φ20	3/4"	19.5-20.5KHz	400-1200W	500-1000ml
Φ25	1"	19.5-20.5KHz	800-1800W	500-1200ml

